


# TOTAL VIEW

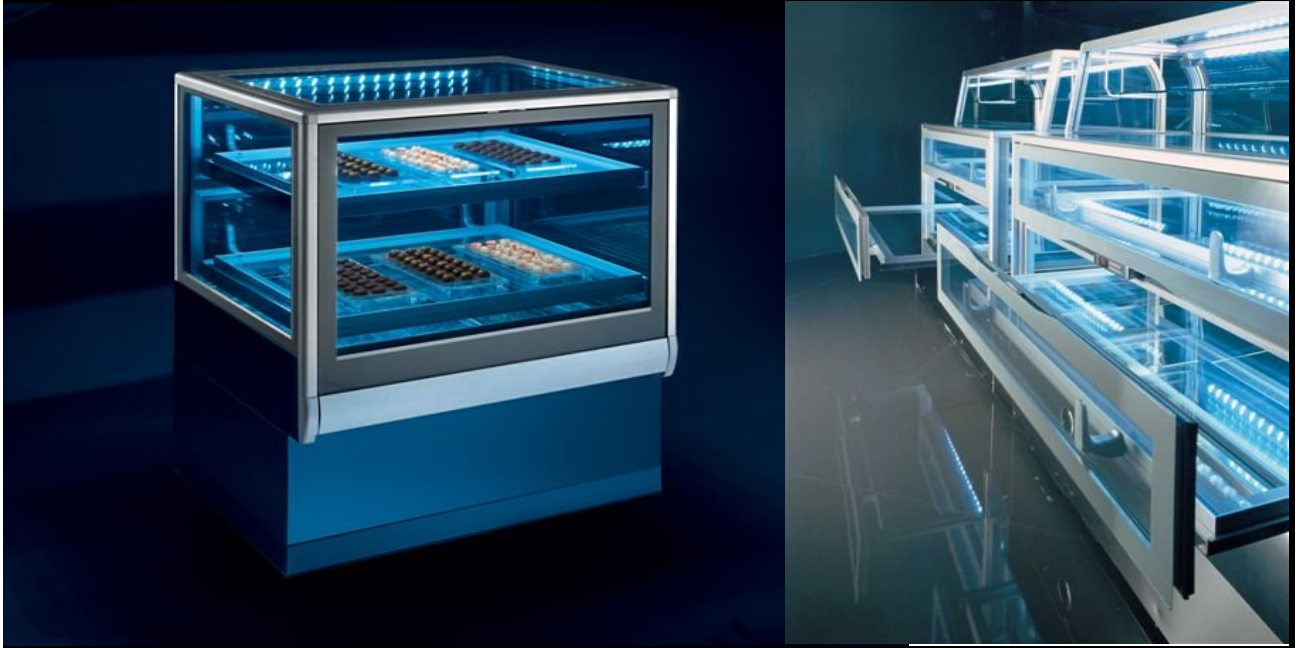

## STRUCTURE

MODULES		1000	1500	2000
LENGHT	[mm]	1000	1500	1984
HEIGHT	[mm]	1151-1500		1151
DEPTH	[mm]	796		
END SIDE PANELS THICKNESS	[mm]	-		
WEIGHT	(kg)	270	375	480
POSSIBILITY TO JOIN WITH OTHER MODULES		X		
TANK		FOAM TANK INJECTED WITH POLYURETHAN AT 40KG/CM		
GLASS STRUCTURE		ALUMINIUM FINISH - DRAWERS ON THE OPERATOR SIDE - FRONT GLASS OPEN LEFT TO RIGHT OR VICEVERSA		
TRAY HOLDER		-		
WHEELS		OP.	OP.	OP.
SLIDING DOORS		-		
CURTAIN		-		
LIGHT		LED		

## PASTRY/PRALINE

MODULES		1000	1500	2000
DISPLAY SHELF		DRAWERS	DRAWERS	DRAWERS
DISPLAY SHELF UPPER PART ( H= 1500 ONLY )		X	X	X
FRONT GLASS		DOUBLE HEATED GLASS		
LATERAL GLASS		DOUBLE HEATED GLASS		
LIGHT COOLING SYSTEM		-		
CONTROL PANEL		ELECTRONIC THERMOSTAT WITH HUMIDITY SENSOR		
COOLING SYSTEM		VENTILATED		
EVAPORATOR		1		
COMPRESSOR TYPE		HERMETIC		
CONDENSATION TYPE		AIR		
DEFROSTING TYPE		ELECTRONIC THERMOSTAT		
EXTERNAL CONDENSATE DRAIN		X	X	X
CONDENSATE PAN		OP.	OP.	OP.

REMOTE COMPRESSOR TYPE		HERMETIC		
CONDENSATION TYPE		AIR		
DEFROSTING TYPE		AT STOP		
CE - GOST CERTIFICATION		X	X	X
CE - GOST POWER SUPPLY	V/ph/Hz	AIR		
ETL SAFETY SANITATION CERTIFICATION	V/ph/Hz	X	X	X
ETL SAFETY SANITATION POWER SUPPLY		115/1/60		
WORKING TEMPERATURE		75 DEGREE F; 55% RH		
CLIMATIC CLASS		35°C 60% UR		